



TECHNICAL DATA SHEETS

CORRUGATED METAL GASKET



- Very good media resistance
- Low permeability towards gases and liquids
- Long-term stable compression and recovery char.

CATEGORY: FLANGE SEAL
MANUFACTURER: IDT
PROFILE: FD30
DIMENSION: EN 1514-1 [EN12560-1]
MATERIAL: WS 3885 DB

- Gaskets for pipeline, device and container flanges
- Chemical, petro-chemical and natural gas industry
- Power stations, thermal oil and heating plants

PRODUCT NAME


**Non-metallic gasket
with inner and outer eyelet and/or centering ring
SIGRAFLEX® HOCHDRUCK**

FEATURES

Sealing system made from SIGRAFLEX® HOCHDRUCK; waterproofed, inserts without adhesives made from 0.05mm stainless steel 316L; inner and outer double eyelet made from stainless steel 1.4571; standard thickness 2.0mm.

PROFILE

FD30

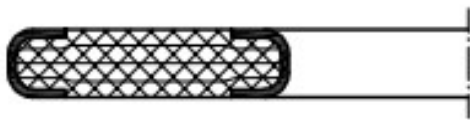

Complies with TA Luft, is blow-out resistant, sturdy, is high strength and easy to handle. Operating pressures up to 250 bar. For use at high operating temperatures. Highly gas-tight. Suitable for tongue/groove [FD30] and raised face flanges [FD33].

OPERATIONAL DATA

Pressure	Max. 250 bar
Temperature	-250°C to 600°C ³
Density [mDIN 2505]	
$\sigma_{VU0.1}$	
σ_{VO}	
$\sigma_{B0300^\circ C [200^\circ C]}$	

APPROVALS

TA Luft 2002 [VDI 2440/2200]	X
BAM oxygen	X
BAM ethylene/propylene	X
DVGW [DIN 3535-6]	X
KTW-guideline	
Fire Safe Test	X
FDA	
EG 1935/2004	
Blow-out resistance	X
Germanischer Lloyd	

Notes: ³ upward of 450°C please consult the manufacturer